



90mm Square (3.54 in.sq)


- Permanent Magnet DC Motors are the best solution to motion control and power transmission applications where compact size, wide operating speed range, ability to adapt to arrange of power.
- Their ability to produce high torque at low speed make them suitable substitutes for gearmotors in many application.
- Compare to the same size AC motor, it is easy to control the speeds and changes the rotation direction with high efficiency.



■ Specifications

MODEL		K9DS60N3
Voltage		90 VDC
No Load	Speed	3250 (r/min)
	Current	1.5 A
Rated Load	Output	60 W
	Speed	3000 (r/min)
	Torque	1.95 (kgf-cm)
	Current	0.8 A
Stall	Torque	25 (kgf-cm)
	Current(A)	11.5 A


Dimensions

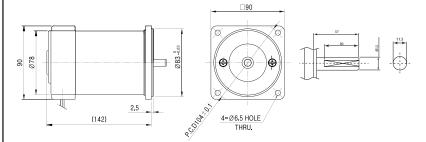

■ Connection Diagram

■ Performance Curve

(RPM)



The direction of motor rotation is as viewed from the front shaft end of the motor Matching Gear Ratio 1:3 to 1:250 & Decimal Gear available

■ Application



Electronic Machinery

Medical Equipment

Conveyor Belts







(A) 3500 3000 2500 2000 1500 1000 500 0 8 10 12 14 16 18 20 22 24 26

Kg.cm

We reserve the right to change the specification without prior notice. www.bthsensor.com