

Features:

- » AC input selectable by switch
 - » High efficiency, high reliability
 - » 100% full load and machine test
 - » Air cooling
 - » Working frequency 37 KHz
 - » Size: 199 x 110 x 50mm




Model & Specification	PKD-120A	
	CH1	CH2
DC output Voltage, Current	5V 0~12A	12V 0~5A
Wave and Noise	60mVp-p	120mVp-p
Inlet wire Stability	± 0.5%	± 1%
Load Stability	± 0.5%	± 6%
Efficiency	78%	
Adjustable Range for DC Voltage	± 10%	± 5%
Input Voltage Range	90~132VAC / 180~264VAC by switch 254~370VDC 47~63Hz	
Impact Current	Cold start current	30A/115VAC 60A/230VAC
Setup, Rise, Hold up Time	200ms, 50ms, 20ms/230VAC at full load	
Withstand Voltage	I/P-O/P: 1.5kV	I/P-FG: 1.5kV O/P-FG: 0.5kV 1minute
Isolation Resistance	I/P-O/P I/P-FG	O/P-FG: 500VDC/100MΩ
Working Temperature	- 10°C ~ +50°C	
Dimension and Weight	199 x 110 x 50mm	0.9kg

Note :


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature
 2. Tolerance: includes set up tolerance, line regulation and load regulation.

■ Dimension Drawing

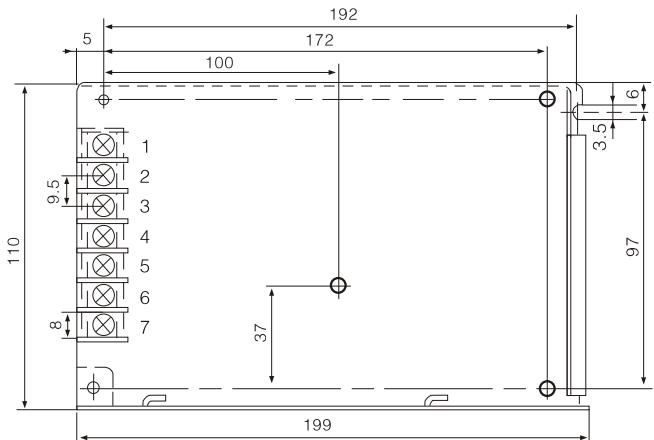

Terminal number	Terminal name
1	AC (L)
2	AC (N)
3	
4	12VOUT (+)
5	COM (-)

Terminal number	Terminal name
6	COM (-)
7	5VOUT (+)
8	
9	ADJ.
10	LED

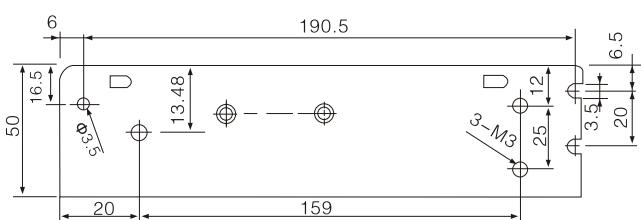

The specifications are subject to change without prior notice

All Dimension are in **mm**

BTB PKD-120A Version 1.0